





Luxusheat FlexiPEX

KEY BENEFITS >>>

- > Smooth bore to prevent scaling
- > Incorporates an oxygen diffusion barrier preventing the ingress of oxygen
- > Quick, clean and simple
- > Manufactured to strict European standards
- > Maximum Temperature: 95°C
- > Highly flexible for ease of installation
- > Suited to large volume UFH installers
- > Made in Italy
- > **25 YEAR PIPE WARRANTY**

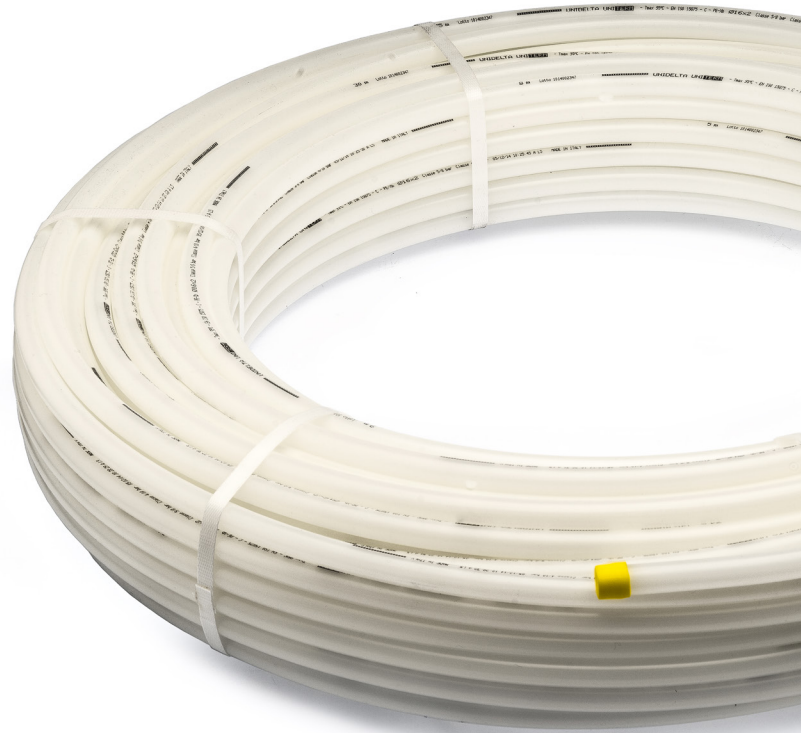

CROSSLINKED POLYETHYLENE INNER LAYER

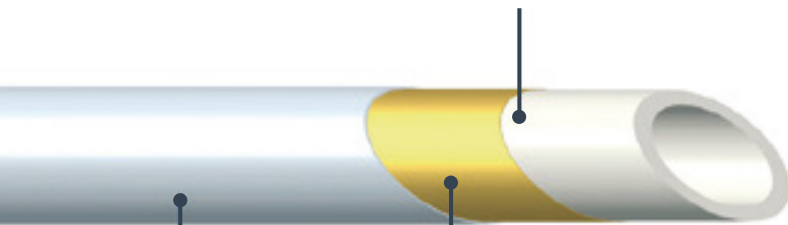

ADHESIVE LAYER

CROSSLINKED POLYETHYLENE OUTER LAYER

PRODUCT LIST >

16X2.0MM FLEXIPEX PIPE COILS

COIL SIZE	PRODUCT CODE
12x2.00m x 85m	1285FP
12x2.00m x 150m	12150FP
16x2.00m x 100m	16100FP
16x2.00m x 200m	16200FP
16x2.00m x 300m	16300FP

< OVERVIEW

The Luxusheat FlexiPEX is a cross linked polyethylene pipe. It consists of three layers a PE-X, primer and an EV-OH oxygen barrier. The pipe incorporates an oxygen diffusion barrier to protect the system from oxygen permeation.

The Luxusheat FlexiPex pipe is rigorously tested to enable the pipe system to have a service life not less than 50 years.