



Temperature Range	5-35°C, 41-95°F	Frost Protection (7°C - 17°C)	Y
Colour Touchscreen	Y	Mesh Networking Facility	Y
Non-Programmable Mode	Y	°C / °F Option	Y
5/2 Day Programming Mode	Y	Built In Air Sensor	Y
7 Day Programming Mode	Y	Remote Air Sensing Mode	Y
24 Hour Mode	Y	Floor Sensing Mode	Y
Number of Heating Levels*	6*	Remote Probe Included	N
Optimum Start	Y	Floor Temp Limit Protection	Y
Number of Switching Times (Timer mode)	4	Cooling	N
Holiday Function	Y	Max Switching Current	3A
Keylock Function	Y	Accuracy +/-	1°C
Temperature Hold Function	Y	Adjustable Switching Differential	0.5°C - 3°C
Temperature Override	Y	Supply	230V AC
Temperature Override Limit	Y	Installed Dimensions	107x89x17mm (L,H,D)
Output Delay	Y	Weight	196g

* limited to 4 comfort levels when used with the neoApp





Feature Table - Thermostat Mode

FEATURE	DESCRIPTION	SETTING	FEATURE	DESCRIPTION	SETTING
01	Switching Differential	0.5°C 1.0°C (Default)	06	Floor Temperature Limit	20° - 45°C (28°C = Default)
02	Frost Protection Temperature	07° - 17°C (12°C = Default)	07	Optimum Start	01 - 05 Hours (Disabled as Default)
03	Output Delay	00 - 15 Minutes (00 = Default)	08	Rate of Change	Minutes to raise by 1°C
04	Up/Down Temperature Limit	00° - 10°C (00 = Default)	09	Device Type	Thermostat or Time Clock
05	Sensor Selection	Built in sensor (Default) Remote Air Sensor Only Floor Sensor Only Built in & Floor Sensor Remote Air & Floor Sensor	10	Temperature Format	°C or °F (°C = Default)
			11	Program Mode	Non-Programmable, 5/2 Day (Default) 7 Day Programming, 24 Hour Mode
			12	Colour Theme	Black or White

Feature Table - Timer Mode

01	Device Type	Thermostat or Time Clock
02	Program Mode	5/2 Day (Default), 7 Day Programming, 24 Hour Mode
03	Colour Theme	Black or White

Product Dimensions (mm) & Wiring Specification

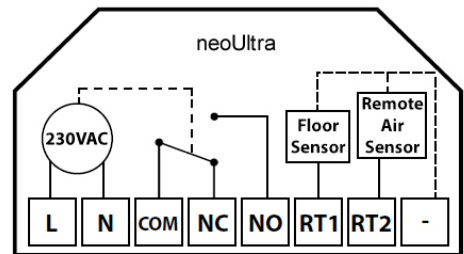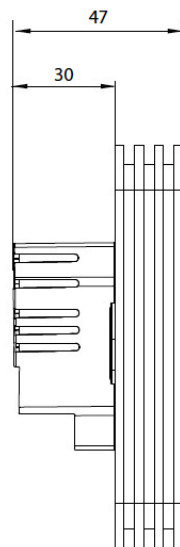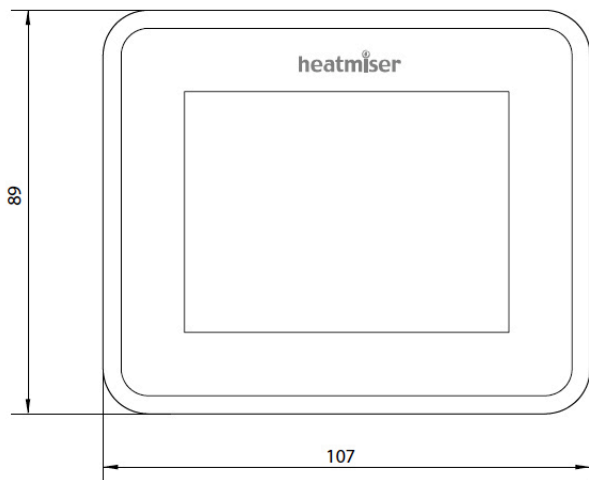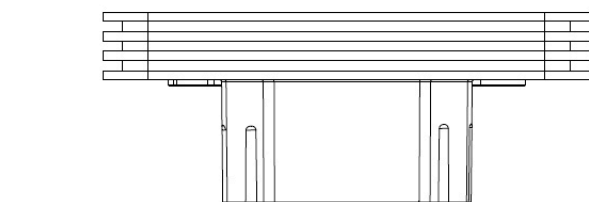

Wiring Detail

